

GENERAL PRODUCT NOTES:

E = EXPOSED FINISHED SURFACE


INSTALLATION IS REQUIRED BY OTHERS.

ALL EDGES TO BE EASED.

MANUFACTURING TOLERANCE  $\pm 1/4"$ .


STD. 2" DIA. DRAIN HOLE

INCLUDES INTERIOR WATER SEALANT

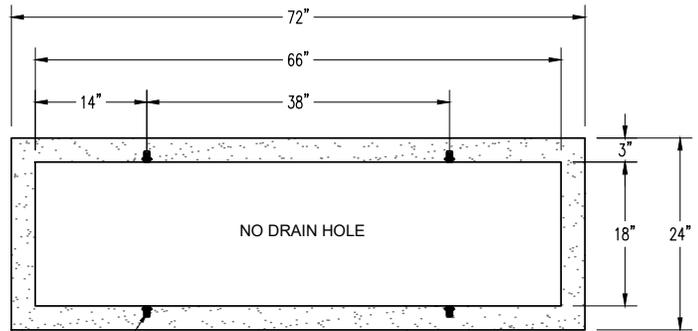


(4) 5/8"DIA. X 1 5/8"L. (FX-16)  
INSERTS FOR LIFTING. (2 PER WALL)

PLAN VIEW

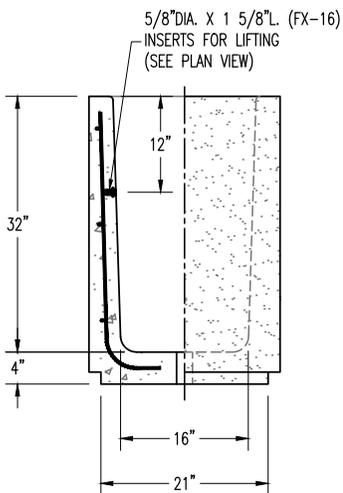


SECTION/SIDE VIEW

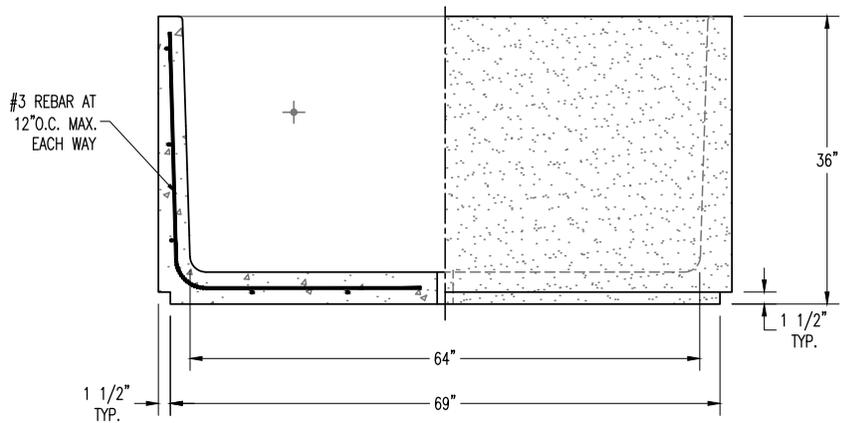

SECTION/ ELEVATION VIEW


#3 REBAR AT  
12"O.C. MAX.  
EACH WAY

5/8"DIA. X 1 5/8"L. (FX-16)  
INSERTS FOR LIFTING  
(SEE PLAN VIEW)

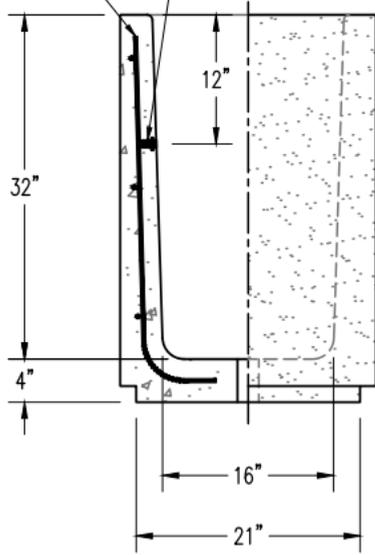

SECTION/SIDE VIEW

(2) CAST-IN LETTERS  
(AT 180° APART)  
FONT: DINFUND PRO PLAIN  
HEIGHT: 4"HT.  
LETTER INSET: 1/8"DP.  
SMOOTH & PAINTED: BLACK  
BACKGROUND: 1/8"DP.  
SMOOTH & UNPAINTED

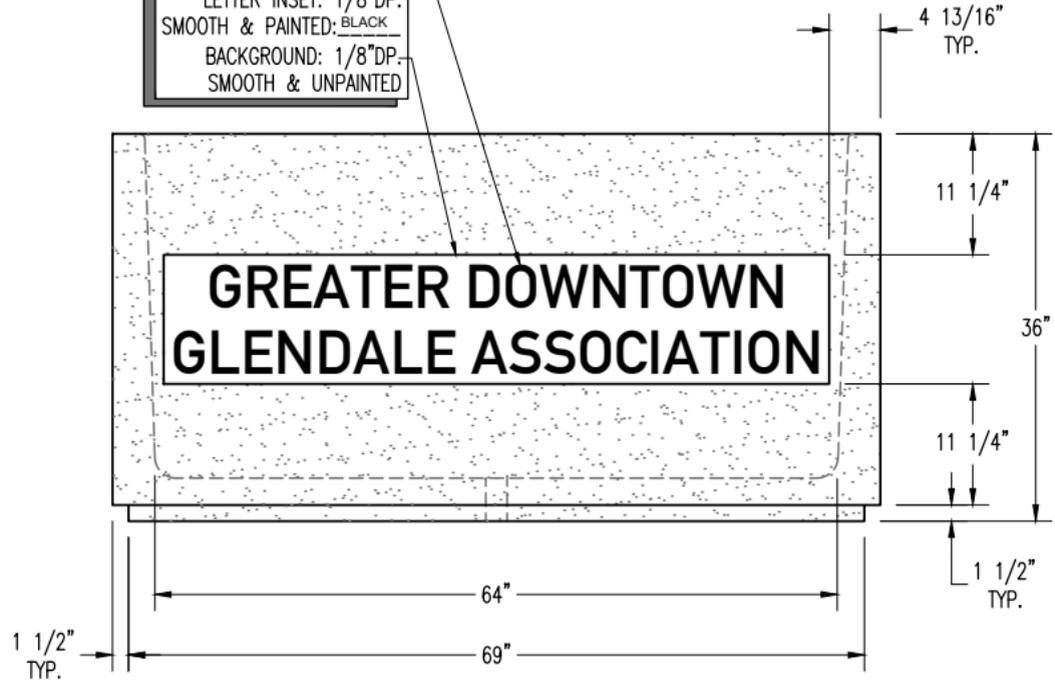

SECTION/ ELEVATION VIEW